


# Osmonics®

## Autotrol® Product Specifications

## Performa™ Filter Valve 960F

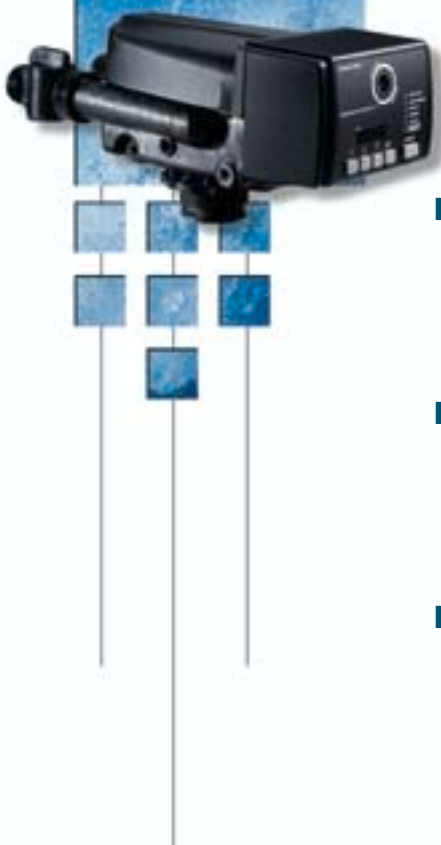

### ■ Flow Rates (Valve Only)

- Service @ 15 psi (1.03 bar) drop..... 25.0 gpm (5.68 m³/h)
- Backwash (Filter) @ 25 psi (1.72 bar) drop ..... 20.0 gpm (4.54 m³/h)
- Service..... Cv = 6.5 (Kv = 5.58)
- Backwash Filter ..... Cv = 4.0 (Kv = 3.46)

### ■ Control Operation

- Timer Configuration ..... Time Clock, 7 or 6 Day
- Cycles: Length: (Standard)
- Backwash ..... 3 - 30 Minutes
- Fast Rinse..... 2 - 19 Minutes

### ■ Valve Connections/Dimensions

- Tank Thread..... 2-1/2 inches – 8, Male
- Inlet/Outlet ..... 1-3/4 inches –12 UNC-2A Male
- Drain Line ..... 3/4-inch NPT, Male
- Brine Line ..... 1/4-inch NPT, Male
- Distributor Tube O.D. Diameter..... 1.050 inches (27 mm)
- Distributor Tube Length..... 1/2 ± 1/2 inches (13 mm ± 13 mm) Above Tank

### ■ Design Specifications/Ratings

- Valve Body ..... Glass-Filled Noryl\*
- Rubber Components..... Compounded for Cold Water
- Weight (Valve with Control) ..... 5.34 lbs (2.0 Kg)
- Transformer Output..... 12VAC 400 mA
- Transformer Input..... 115V 50/60 Hz; 230V 50/60 Hz;  
100V 50/60 Hz
- Recommended Operating Pressure..... 20 - 120 psi (1.38 - 8.27 bar)  
Canada..... 20 - 100 psi (1.38 - 6.89 bar)
- Water Temperature..... 35° - 100°F (2° - 38°C)

### ■ Options

- Bypass Valve, Model 1265 ..... 1-3/4 inches - 12 UNC-2A Male
- Bypass Inlet/Outlet Fitting Kits:
- Copper, Sweat Tube Adapter..... 1-inch or 3/4-inch or 28 mm or 22 mm
- CPVC, Solvent Weld Tube Adapter ..... 1-inch or 3/4-inch or 25 mm
- Plastic NPT or BSPT Pipe Adapter..... 1-inch Male or 3/4-inch Male
- Brass NPT or BSPT Pipe Adapter ..... 1-inch Male or 3/4-inch Male





### ■ Backwash Flow Control Table

Backwash Number	7	8	9	10	12	13	14
Flow Rate (gpm)	1.3	1.7	2.2	2.7	3.9	4.5	5.3
Flow Rate (m³/h)	0.29	0.39	0.50	0.61	0.88	1.02	1.20

External backwash flow controls available for flow rates of 5 gpm (1.13 m³/h), 6 (1.36 m³/h), 7 (1.59 m³/h), 8 (1.82 m³/h), 9 (2.04 m³/h), and 10 (2.27 m³/h).

\*Noryl is a trademark of General Electric Company.

## ■ Pressure Loss Characteristics

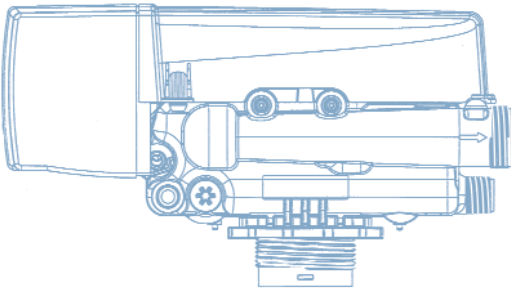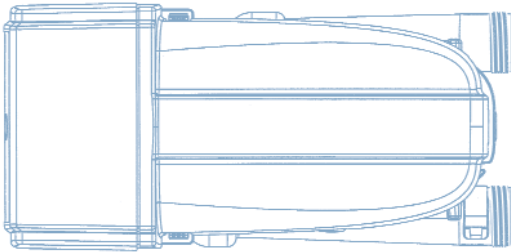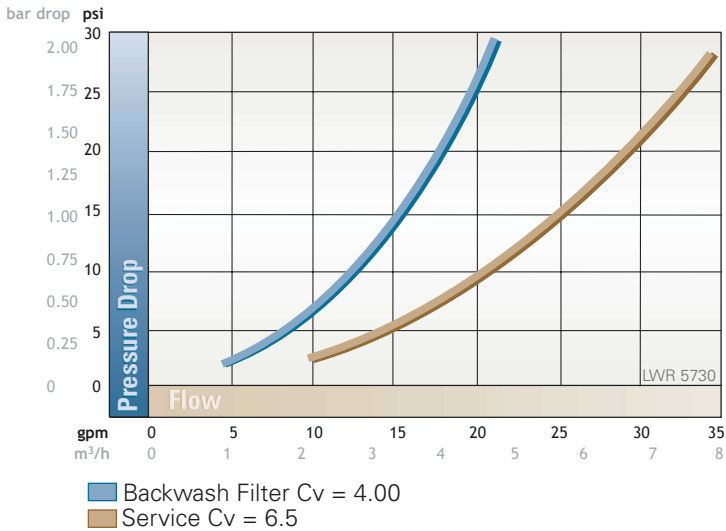

Autotrol Brand  
Residential Controls



### For More Information:

Call **Osmonics Household Water Group** at **(262) 238-4400** or **(800) 279-9404**, or visit **www.osmonics.com**



# OSMONICS

#### North American Sales

5951 Clearwater Drive  
 Minnetonka, MN  
 55343-8995  
 USA  
 (952) 933-2277 Phone  
 (952) 933-0141 Fax

#### Latin America Sales

Rua Pastuer, 463, 13 Andar  
 Centro Empressarial Jactoba  
 Curitiba - PR, CP 80250-080  
 BRAZIL  
 +55 41 312 1691 Phone  
 +55 41 312 1699 Fax

#### Euro/Africa Sales

230 rue Robert Schurman  
 ZA des Uselles  
 77350 Le Mée sur Seine  
 FRANCE  
 +33 1 64 10 2000 Phone  
 +33 1 64 10 3747 Fax

#### Asia/Pacifics Sales

1044/8 SOI 44/2  
 Sukhumvit Road Parkanog  
 Bangkok 10110  
 THAILAND  
 +66 2 38 14213 Phone  
 +66 2 39 18183 Fax

